



## Gyprock Tempo™ Cornice


Tempo is part of Gyprock's Inspirations range of cornice profiles. Clean surfaces and subtle lines make Gyprock Tempo cornice a popular choice for contemporary interiors that require a crisp designer edge in every element of the room.

Tempo's multiple shadow lines and 90mm profile enhance the sense of space in a modern home making it ideal for open-plan living. Tempo can be used in retrofit applications over 55mm Cove cornice which makes it the perfect option to add style when you are freshening up an existing room.

To see how Tempo can enhance your room check out our [cornice visualiser](#) and download our [HomeStyle magazine](#) for great ideas and style tips to create the look you love.

Plasterboard cornice is extremely easy to cut, join and paint with no special tools or fixing equipment required, making it a cost-effective way to create great ambience at home.

Consider cornice when you are planning a new home to add detail and a personal touch. For a complete look, keep your architecture and door hardware in theme with your cornice style.

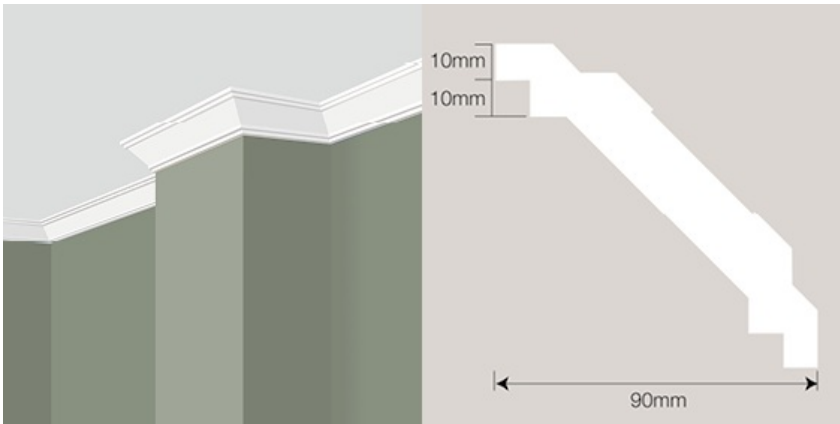

Product Availability					
Width(mm)	Length (mm)				
	3000	3600	4200	4800	5400
90					

To confirm product availability, please check with your local [Gyprock supplier](#), or contact [Gyprock customer service](#)

## Cornice Manufacture

Gyprock Tempo cornice is composed of gypsum plaster encased in a strong linerboard and is manufactured to stringent product specifications.

# Installation

Comprehensive installation instructions for Gyprock cornice can be found under the [Resources](#) tab and include:

- [DIY installation guides](#)
- [DIY installation videos](#)
- [Residential Installation Guide](#)

For assistance with installation, try searching for a [Gyprock plasterer](#), [builder](#) or [repairer](#) under the [Locations](#) tab.

## Painting and Decoration

Finishes applied to cornice surfaces can have a significant effect on the perceived quality of the installation, particularly where critical lighting conditions exist.

- Matt finishes minimise imperfection visibility
- Semi-gloss and gloss finishes highlight imperfections
- Light colours are less likely to show imperfections

Gyprock recommends paint systems consisting of one coat of a plasterboard sealer followed by two coats of finishing paint. Always follow the manufacturer's instructions for application and recoating.

Gyprock recommend decoration in line with [Master Painters Australia](#).

## Material Safety

### MSDS

A [Material Safety Data Sheet](#) for Gyprock cornice is available from the Gyprock website under the [Resources](#) tab.

### Handling

For guidelines on the safe handling of Gyprock cornice, reference should be made to the Gypsum Board Manufacturers of Australasia (GBMA) publication *"Move it the GBMA Way – A Safe Manual Handling Guide for the Plasterboard Industry – Training Guide"* (Reference SS172).

Be inspired by projects that include Gyprock Tempo.



The subtle lines of Tempo mixed with soft and natural timbers and fabrics create this casual, relaxed and modern living space. See more in the third edition of [HomeStyle magazine](#)



Tempo's small in-step creates multiple shadow effects and helps to visually enhance this modern dining space. See more of this dining room [here](#)



Tempo gives this kitchen a designer edge with its strong lines and multiple shadow effects.



Gyprock products are  
manufactured for life  
with all CSR products  
designed to achieve  
optimal performance  
when part of a CSR  
integrated system

**GYPROCK<sup>®</sup>**

Everything else is just plasterboard

